


BRACKETT

CHIPUR
CHIPBOARD INSERTER

*Automatic
chipboard
insertion
for
roll-to-sheet
presses.*

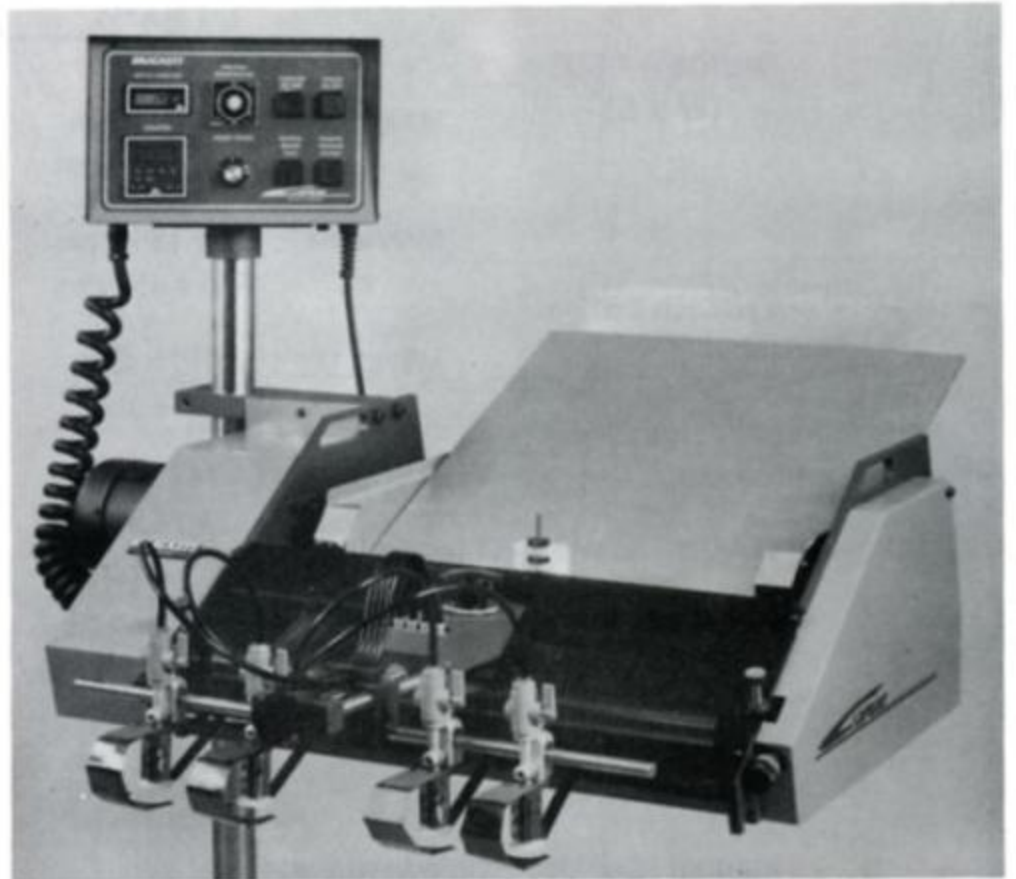

Patented CHIPUR handles chipboard up to 26.5 x 22 inches. Quick set-up. Proven performance. Accurate sheet counts. (Model 2100M, shown above)

The Brackett CHIPUR feeds chipboard into the lapstream delivery (shingled sheets) of your web press at precise, predetermined intervals... as frequently as every 25 sheets.

CHIPUR utilizes a series of vacuum separator units which lift up printed sheets in the delivery stream momentarily to allow chipboard insertion.

CHIPUR installs and adjusts in minutes to fit the height of your press — a Didde or other popular roll-to-sheet press.

CHIPUR replaces hand inserting — or in some installations, takes the place of an expensive, cumbersome, limited application inserter.

Hand insertion is slow, labor intensive and costly. CHIPUR eliminates bottlenecks and turns your bindery into a smooth, trouble-free profit center.

If you've been using other methods of inserting

chipboard for pad backs, separator sheets, etc., you only have to watch the CHIPUR in action to be convinced of its value to your press operation.

To determine how a CHIPUR can interface with your web press, ask us to send you an Installation Survey Questionnaire.

POPULAR INSERTION APPLICATIONS

- Pad back stiffeners
- Package stabilizers
- Sheet count markers
- Cover sheets
- Other placements

CHIPUR.... a precision performer with remarkable consistency. After a quick set-up, you simply load the hopper. CHIPUR counts the sheets and inserts chipboard at the proper interval... automatically.

Brackett

CHIPUR
CHIPBOARD INSERTER

SPECIFICATIONS

		1500M	2100M	2700M
DIVIDER SIZE (W x L)	MINIMUM	5 x 8 inches 127 x 203 mm	5 x 8 inches 127 x 203 mm	8.5 x 11 inches 127 x 203 mm
	MAXIMUM	14 x 18 inches 356 x 457 mm	21.5 x 22 inches 546 x 559 mm	26.5 x 22 inches 673 x 559 mm
THICKNESS	MINIMUM	.010 inches .254 mm	.010 inches .254 mm	.010 inches .254 mm
	MAXIMUM	.187 inches 4.74 mm	.187 inches 4.74 mm	.187 inches 4.74 mm
MACHINE WEIGHT	Control Head	17 lbs. (7.7 kg)	17 lbs. (7.7 kg)	17 lbs. (7.7 kg)
	Inserter Head	127 lbs. (57.7 kg)	142 lbs. (64.5 kg)	178 lbs. (80.7 kg)
	Mobile Stand	91 lbs. (41.3 kg)	91 lbs. (41.3 kg)	91 lbs. (41.3 kg)

INSERT OPERATION

Manual (Set-Up) Single Insertions
Or Multiple Insertions
Automatic Adjustable Speed
Adjustable Insert
Sequence

INSERT FREQUENCY

Minimum Every 25 sheets @ 850FPM
(Press Speed)

INTEGRAL VACUUM SUPPLY

1/6HP Diaphragm Pump

FRAME

Adjustable Height-Fits Press
Conveyor Heights
Minimum: 21 In. 53 cm
Maximum: 42 In. 107 cm

FEED SECTION

Manually Top Loaded Hopper.
Friction Fed From Bottom.

POWER REQUIREMENTS

120VAC 50-60HZ 840 VA (watts)

OPTIONAL ELECTRICAL

240VAC 50-60 HZ 840 VA (watts)
Requires optional transformer.

APPROVED DESIGN AND CONSTRUCTION:  • OSHA • ANSI

U.S. PATENT NO. 5286016

Brackett Inc.

P.O. Box 19306
Topeka, KS 66619
(800)-255-3506 (785)-862-2205
FAX (785)-862-1127
E-Mail: sales@brackett-inc.com
Internet: www.brackett-inc.com